

Ultrasonic Level Transmitter for Liquids



measuring
•
monitoring
•
analysing

NUS-4



- Measuring range:
Liquids: up to 25 m
- Accuracy:
 $\pm 0,2$ % of reading
 $+0,05$ % of full scale
- p_{\max} : 25 psig
 t_{\max} : 190 °F
- Connection:
1½ NPT, 2 NPT
ANSI-flange 3", 5", 6"
- Housing material: Aluminium
Sensor material: PP
- Output: 4 ... 20 mA, Relay or
programming unit with
LCD display



KOBOLD companies worldwide:

ARGENTINA, AUSTRIA, BELGIUM, BULGARIA, CANADA, CHILE, CHINA, COLUMBIA, CZECHIA, DOMINICAN REPUBLIC, EGYPT, FRANCE, GERMANY, GREAT BRITAIN, HUNGARY, INDIA, INDONESIA, ITALY, MALAYSIA, MEXICO, NETHERLANDS, PERU, POLAND, ROMANIA, SINGAPORE, SOUTH KOREA, SPAIN, SWITZER-LAND, TAIWAN, THAILAND, TUNISIA, USA, VIETNAM

KOBOLD Instruments, Inc.
1801 Parkway View Drive
Pittsburgh, PA 15205
☎ Head Office:
1.412.788.8230
☎ 1.412.788.4890
info@koboldusa.com
www.koboldusa.com



Ultrasonic Level Meter Model NUS-4

Description

The KOBOLD ultrasonic transmitter, model NUS-4, is used for non-contact, continuous level and volume measurement in vessels or for flow measurement in open channels.

Level measurement technology based on the non-contacting ultrasonic principle is especially suited for applications where, for any reason, no physical contact can be established to the surface of the media to be measured.


Such reasons may include corrosive attack by the process medium against the measuring device material (acids), possible contamination (sewage) or particles of the process medium adhering to the measuring device (adhesive materials).

The ultrasonic level metering technology is based on the principle of measuring the time required for the ultrasound pulses to make a round trip from the sensor to the level to be measured and back. The sensor emits an ultrasonic pulse train and receives the echoes reflected. The electronics evaluate the echo time of the pulses and determines the level. The evaluating electronics is mounted compact on the unit.

For remote transmission, a norm signal output and for monitoring purposes, a relay contact is available. For programming and for local display, the units may be delivered with an optional pluggable programming unit with LCD display.

The sensors have a total beam angle of 5°-7° at -3 dB. This ensures a reliable measurement in narrow silos with uneven side walls as well as in process tanks with various protruding objects. Furthermore, as a result of the narrow beam angle - the emitted ultrasonic signals have an outstanding focus - deep penetration through gases, vapor, and foam is ensured.

Technical Details



Conical Beam Diameter D (m)

H	NUS-4004	NUS-4006	NUS-4008	NUS-4010	NUS-4015	NUS-4020
1 m	0.15 m	0.14 m	0.18 m	0.16 m	0.21 m	0.27 m
2 m	0.25 m	0.23 m	0.30 m	0.25 m	0.30 m	0.39 m
4 m	0.46 m	0.40 m	0.54 m	0.42 m	0.47 m	0.64 m
6 m	-	0.58 m	0.79 m	0.60 m	0.65 m	0.88 m
8 m	-	-	-	0.77 m	0.82 m	1.13 m
10 m	-	-	-	0.95 m	1.00 m	1.37 m
15 m	-	-	-	-	1.43 m	1.98 m
25 m	-	-	-	-	-	3.21 m

Measuring principle:	ultrasonic principle, echo time measurement
Frequency:	see order table
Beam cone:	NUS-4004 : 6°, NUS-4006, -4010, -4015 : 5° NUS-4008, NUS-4025 : 7°
Delay time:	10, 30, 60 seconds; programmable
Meas. accuracy (at 68°F):	±0.2% of reading +0.05% of full scale
Resolution:	depending on measuring distance <2 m : 1 mm 2...5 m : 2 mm 6...10 m : 5 mm >10 m : 10 mm
Mounting position:	vertical to the product surface
Process temperature:	-22... +190°F
Ambient temperature:	-22... +158°F -13... +158°F (with programming unit)
Operating pressure:	7.3... 43.5 psi abs. (<14.5 psi abs. on request)

Materials

Housing:	Aluminium, powder-coated
Sensor & connection:	Polypropylene
Process connection:	

NUS-4004:	1½ NPT
NUS-4006, NUS-4008:	2 NPT
NUS-4010:	ANSI 3"
NUS-4015:	ANSI 5"
NUS-4025:	ANSI 6"

Electrical connection:	2 x M20x1,5 cable gland cable diameter 6... 12 mm and 2 x ½" NPT wire cross section: 0.5... 1.5 mm ² Relay (SPDT) 30V _{DC} , 1A
Switching output:	4... 20 mA (3.9... 20.5 mA) galvanically isolated, protection against surge transients
Analogue output:	max. (U _s - 11.4 V) / 0.02 A, 12-36 V _{DC} , 2-wire (reverse polarity protected)


Load:	max. (U _s - 11.4 V) / 0.02 A,
Power supply:	12-36 V _{DC} , 2-wire (reverse polarity protected)
Display (pluggable):	6-digit LCD-Display, symbols and bar graph, PBT, fiberglass reinforced, flame proof (DuPont®)

Protection:	Sensor IP 68, Housing: IP 67
Weight:	with thread: approx. 2.5 lbs with flange: approx. 5.6 lbs

Electrical Connection

Analog output

The standard version is delivered with 4-20 mA signal output.

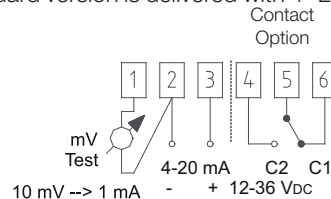



The following can be programmed with keys:

- Assignment of the 4 or 20 mA signals to the required levels
- Error indication by the current output (3.8 mA, 22 mA or hold the last value)
- Damping of analog output (10, 30, 60 sec.)

Factory default:

- 4 mA: assigned to the minimum level 0%
- 20 mA: assigned to the maximum level 100%
- Error indication by the current output: hold last value
- Damping: 60 sec.

Relay output:

The units may be optionally delivered with a relay output. Following functions may be programmed with help of programming unit:

- 2-point switching for latching of level
- Error signal in case of Echo Loss
- Pulse output for volume counting when used as a flow meter


When shipped without programming unit, the NUS-4 is delivered in a 2-point switching state (tank empty – relay energized, tank full – relay de-energised).

Programming unit with LCD-Display:

The pluggable programming unit can be used to display the measured values during measurement and to change the program functions during programming.

2 individual accessible programming modes may be chosen:

- Quickset, for quick programming of important parameters
- Full programming

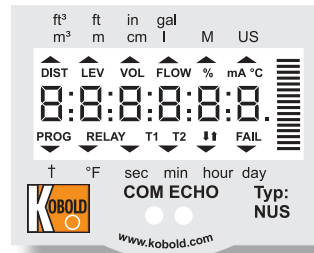

Adjustable functions with programming unit


- Engineering units for the display (US or metric)
- Maximum measuring distance
- Value for 4 mA output signal
- Value for 20 mA output signal
- Error type indication of analogue output
- Damping time
- Selection distance measurement, level measurement, volume measurement, weight (when density is known), flow measurement in open channels
- Optimisation of measurement
- Linearisation
- Close-end-blocking
- Far-end-blocking
- Direction of level change
- Selection of pre-programmed 11 vessel forms for volume measurement
- Selection of pre-programmed 21 measuring channels for flow measurement in open channels
- Total flow amount resettable
- Total flow amount non-resettable
- Bar graph assigned to analogue output or echo
- Keyword protection
- Simulation mode

Order details (Example: NUS-4004 N8 340)


Model	Sensor Material	Measuring Range	Frequency [kHz]	Connection	Power supply	Output/ Display
NUS-4	0 = Polypropylene	04 = 0.2 - 4m	80	N8 = 1½ NPT	3 = 12 - 36 V _{DC}	40 = 4 - 20 mA R0 = 4 - 20 mA and relay 4P = pluggable programming unit with LCD-Display, 4 - 20 mA RP = pluggable programming unit with LCD-Display, 4 - 20 mA, Relay
		06 = 0.25 - 6m	80	N9 = 2 NPT		
		08 = 0.35 - 8m	60			
		10 = 0.35 - 10m	60	AB = ANSI-flange 3"		
		15 = 0.45 - 15m	40	AD = ANSI-flange 5"		
		25 = 0.6 - 25m	20	AE = ANSI-flange 6"		
NUS-400P	pluggable programming unit with LCD-Display					

Dimensions


NUS-4004...

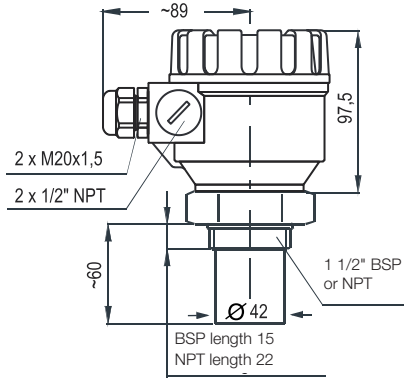


NUS-4006...

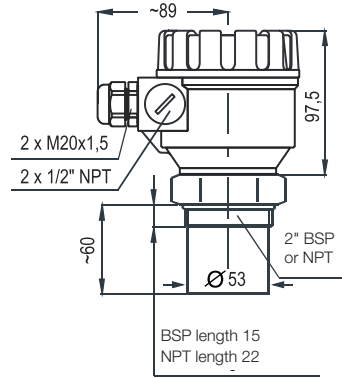


NUS-4008...

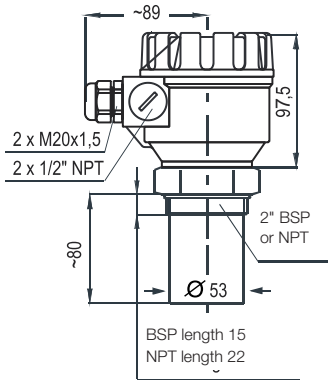

NUS-4010...

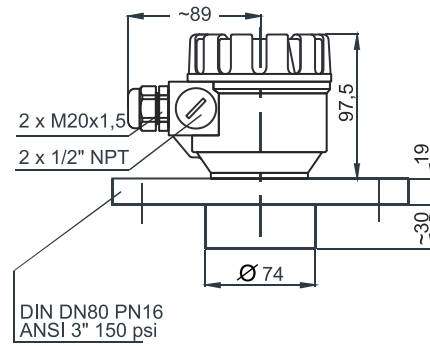

NUS-4015...

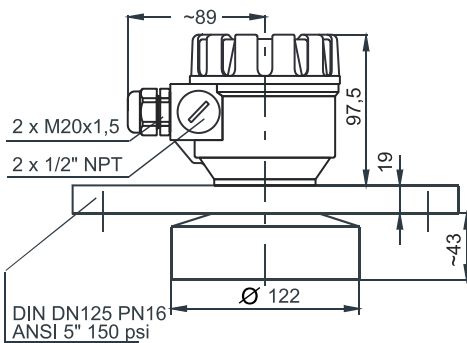

NUS-4025...

