


## RL-6101 Isolation Relay

Contact protection is the sole function of the RL-6101. Dry switch closure energizes the internal 10 amp, 240 VAC max. relay.

### Specifications

<b>Output:</b>	SPDT Relay 10 A @ 240 VAC 8 A @ 24 VDC
<b>Input:</b>	Dry contacts
<b>Supply Voltage:</b>	110 VAC
<b>Physical Data</b>	
<b>Housing:</b>	Molded Polyamide NEMA 1 DIN rail mountable
<b>Operating Ranges</b>	
<b>Temperature:</b>	0 to 130°F
<b>Humidity:</b>	0 to 95% RH Non-condensing

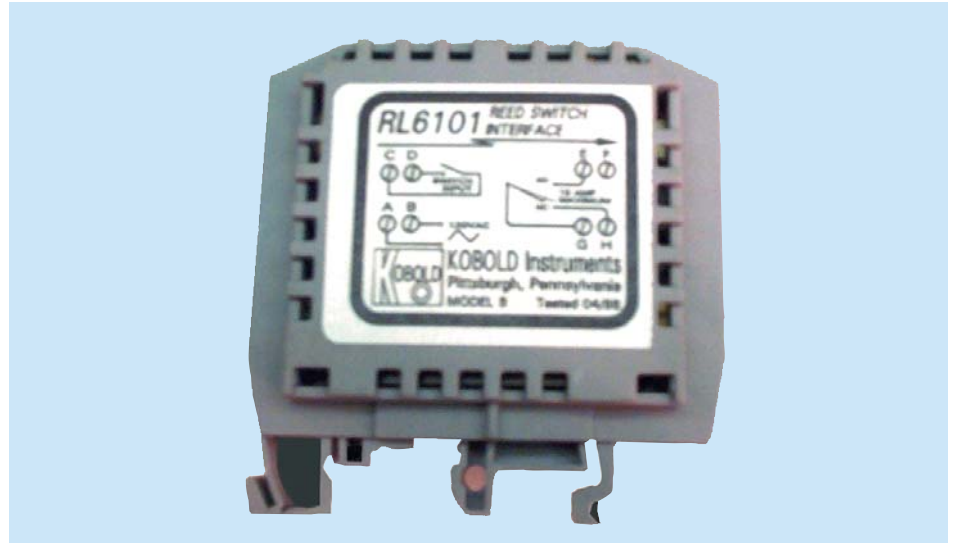

## MSR-1122P03 Latching Relay

The KOBOLD MSR-1122P03 is a latching relay for start/stop applications such as pump or valve control. The 8 amp relay is adequate for most pump/valve control circuits. The relay is designed for dry contact control inputs. This relay can also be field-wired to function as an isolation relay.

### Specifications

<b>Output:</b>	SPDT Relay 8 A @ 240 VAC
<b>Input:</b>	Dry contacts
<b>Supply Voltage:</b>	110 VAC +6%, -10%
<b>Electrical Protection:</b>	NEMA 1
<b>Mounting:</b>	DIN Rail or through holes

### MSR/RL Ordering Information

Supply Voltage	Part Number	
	Latching Relay	Isolation Relay
110 VAC	MSR-1122P03	RL-6101